32 YEARS EXPERIENCE
32多年的生产经验

永嘉县奥诚五金制品有限公司
YONGJIA AOCHENG HARDWARE CO.,LTD
电话 Tel: +86-0577-6721 1565
传真 Fax:+86-0577-6721 2766
手机 M.T:+86-130 9194 0925 (WhatsApp)
邮箱 E-mail: aocheng@vip.163.com
网址 Http://yjaocheng.en.alibaba.com

MADE IN CHINA
100% AOCHENG
QUALITY

AOCHENG

卷盘工业专家

Hose Reel Technology Solutions

32 YEARS EXPERIENCE
32年的生产经验

SINCE 1985

AOCHENG

Hose reel technology solutions

卷盘工业专家

AOCHENG COMPANY Introduction 奥诚公司简介

SINCE 1985

Yongjia Aocheng Hardware Co., Ltd. established in 2007 has been manufacturing diesel hose reel,grease hose reel, oil hose reel, air/water hose reel, adblue hose reel and its accessories for more than 30 years.

After spending a lot of years in developing markets, Aocheng Hardware has established more than two factories which are expert in manufacturing hose reel related accessories.

Our management system passed ISO9000:2000 certificated in the year 2009 and CE certificated in the year 2008. We also have many products that are under the process of UL approval.

At present , our company exports 70% of our products which are produced by our professional staff members. We hope to share with you our ingeniousness and collaborative spirit that enable our company to succeed.

永嘉县奥诚五金制品有限公司(创立于2007年)主要生产，研发和销售：柴油卷盘，黄油卷盘，机油卷盘，水、空气卷盘，尿素卷盘等产品。

经过几年发展和耕耘,奥诚现在拥有两个卷盘及附件制造厂,分别位于温州市龙湾区和永嘉县。管理体系通过了ISO9000:2000认证，产品通过了CE和RoHS认证，部分产品通过了UL认证。

现在我们已有70% 的产品出口到国外，更重要的是，我们有专业的团队，不屈和共赢的精神，努力为客户提供最高性价比的产品。

AOCHENG
Hose reel technology solutions
卷盘工业专家

SINCE 1985

Http://yjaocheng.en.alibaba.com

AOCHENG Contents
卷盘产品目录

立式连体机
Dispenser-Hose Reel >>01-02

卧式连体机
Dispenser-Hose Reel >>03-04

防爆汽油机
Ex-Proof Dispenser >>05-06

尿素加注机/卷管器
AdBlue Dispenser/Hose Reel >>07-08

定量计量卷管器
Preset Dispenser >>09-10

电动卷管器
Electrical Hose Reel >>11-12

柴油自动卷管器
Diesel Hose Reel >>13-14

机油自动卷管器
Oil Hose Reel >>15-16

黄油高压卷管器
Grease Hose Reel >>17-18

空气/水自动卷管器
Air/water Hose Reel >>19-20

Product introduction/ 产品介绍

RoHs compliant

MADE IN CHINA 100% AOCHENG QUALITY

Dispenser-Hose Reel
立式连体机

Dispenser unit with automatic hose reel, the 15 metres of hose with automatic nozzle allows dispensing up to 50－65L/min with DC power supply.The automatic hose reel, the DC pumps and the automatic nozzle are integrated in a sturdy supporting structure. Easy to install, versatile, compact, necessary to complete mobile or fixed tanks.

集高效率，高性能，高强度为一体的柴油自动卷管器开创了中国柴油卷管器市场新的篇章，设计美观, 振奋精神，操作简便，广泛用于油罐车，工程保养车，内部车队加油车间等领域。

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	流量 (升 / 分) low Rate L/M	管子长度 Hose Length	进口 Inlet	出口 Outlet
LS1115-12V	Hose reel with 15m hose, 12V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	47-55L	15m	BSP1"M	BSP1"M
LS1115-24V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	50-57L	15m	BSP31"M	BSP1"M
LS1115-220V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	55-60L	15m	BSP1"M	BSP1"M
LS1110-12V	Hose reel with 15m hose, 12V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	47-55L	10m	BSP1"M	BSP1"M
LS1110-24V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	50-57L	10m	BSP1"M	BSP1"M
LS1110-220V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	55-60L	10m	BSP1"M	BSP1"M

LS1115
Dispenser-Hose Reel

Technical Data/ 技术参数表

使用电源: Voltage	12V / 24V / 220V
型机功率: Power	600W / 600W / 600W
流量范围: Flow range	1寸管款流量60L/min： 60L/min(one inch hose)
计量精度: Accuracy	+/-:0.3%
显示屏位数: digit capacity	体积：8位LCD数码显示，6位整数(如000389.56) Volume: 8 bits LCD digital display,6 bits integral(such as 000389.56)
	金额：8位LCD数码显示，6位整数(如000045.38) Price: 8 bits LCD digital display,6 bits integral(such as 000045.38)
	单价：4位LCD数码显示，2位整数(如07.78) Unit price: 4 bits LCD digital display, 2 bits integral(such as 07.78)
单价设计范围: Single design range	0~99.99
单次计数范围: Single range	体积或金额：999999.99 Volume or price: 999999.99
日累计数范围: daily cumulative range	体积或金额：999999.99 Volume or price: 999999.99
总体积累计范围(升): Accumulative range(liter)	99999999
总金额累计范围(元): Accumulative range(price)	99999999
油管长度: hose length	标配：10米和15米出油管 2米进油管 Standard: oil output pipe:10m, 15m inlet pipe: 2m
吸程: suction height	5m
扬程: delivery lift	20m
重量: weight	12V/24V 重量为：120Kg 220V 重量为：120Kg 12V/24V: 120KG 220V: 122KG

Product introduction/ 产品介绍

RoHs compliant

MADE IN CHINA 100% AOCHENG QUALITY

Dispenser-Hose Reel
卧式连体机

Dispenser unit with automatic hose reel, the 15 metres of hose with automatic nozzle allows dispensing up to 50-65L/min with DC power supply. The automatic hose reel, the DC pumps and the automatic nozzle are integrated in a sturdy supporting structure. Easy to install, versatile, compact, necessary to complete mobile or fixed tanks.

集高效率，高性能，高强度为一体的带泵自动卷管器开创了中国卷管器市场新的篇章，设计美观，操作简便，自带油泵（50-65L/min），滤网和加油枪，广泛用于移动油罐车，工程队，内部车队加油等领域。

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	流量（升/分） low Rate L/M	管子长度 Hose Length	进口 Inlet	出口 Outlet
WS1115-12V	Hose reel with 15m hose, 12V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	47-55 L	15m	BSP1"M	BSP1"M
WS1115-24V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	50-60 L	15m	BSP31"M	BSP1"M
WS1115-220V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	55-65 L	15m	BSP1"M	BSP1"M
WS1110-12V	Hose reel with 15m hose, 12V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	47-55 L	10m	BSP1"M	BSP1"M
WS1110-24V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	50-60 L	10m	BSP1"M	BSP1"M
WS1110-220V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	55-65 L	10m	BSP1"M	BSP1"M
WS3415-12V	Hose reel with 15m hose, 12V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	27-35 L	15m	BSP1"F	BSP3/4"M
WS3415-24V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	30-40 L	15m	BSP1"F	BSP3/4"M
WS3415-220V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	30-40 L	15m	BSP1"F	BSP3/4"M
WS3410-12V	Hose reel with 15m hose, 12V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	27-35 L	10m	BSP1"F	BSP3/4"M
WS3410-24V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	30-40 L	10m	BSP1"F	BSP3/4"M
WS3410-220V	Hose reel with 15m hose, 24V, 60l/min, 500W	Diesel,Korensen, 柴油，煤油	30-40 L	10m	BSP1"F	BSP3/4"M

WS3415
Dispenser-Hose Reel

Technical Data/ 技术参数表

使用电源: Voltage	12V / 24V / 220V
型机功率: Power	600W / 600W / 600W
流量范围: Flow range	1寸管款流量60L/min： 60L/min(one inch hose)
计量精度: Accuracy	+/-:0.3%
显示屏位数: digit capacity	体积：8位LCD数码显示，6位整数(如000389.56) Volume: 8 bits LCD digital display,6 bits integral(such as 000389.56)
	金额：8位LCD数码显示，6位整数(如000045.38) Price: 8 bits LCD digital display,6 bits integral(such as 000045.38)
	单价：4位LCD数码显示，2位整数(如07.78) Unit price: 4 bits LCD digital display, 2 bits integral(such as 07.78)
单价设计范围: Single design range	0~99.99
单次计数范围: Single range	体积或金额：999999.99 Volume or price: 999999.99
日累计数范围: daily cumulative range	体积或金额：999999.99 Volume or price: 999999.99
总体积累计范围(升): Accumulative range(liter)	99999999
总金额累计范围(元): Accumulative range(price)	99999999
油管长度: hose length	标配：10米和15米出油管 2米进油管 Standard: oil output pipe:10m, 15m inlet pipe: 2m
吸程: suction height	5m
扬程: delivery lift	20m
重量: weight	12V/24V 重量为：120Kg 220V 重量为：120Kg 12V/24V: 120KG 220V: 122KG

Product introduction/ 产品介绍

RoHs compliant

MADE IN CHINA 100% AOCHENG QUALITY

Ex-Proof Dispenser
防爆汽油机

Ex-Proof Dispenser unit with automatic hose reel, the 6 metres of hose with automatic nozzle allows dispensing up to 20－35L/min with DC power supply.
The DC pumps and the automatic nozzle are integrated in a sturdy supporting structure. Easy to install, versatile, compact, necessary to complete mobile or fixed tanks.

集高效率，高性能，高强度为防爆加油开创了中国卷管器市场新的篇章，设计美观，操作简便，自带油泵（20-35L/min), 滤网和加油枪，广泛用于移动油罐车，工程队，内部车队加油等领域。

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	流量 (升 / 分) low Rate L/M	管子长度 Hose Length	进口 Inlet	出口 Outlet
QY3406-12V	12V, 30l/min, 300W	Gasoline 汽油	20-35L	06m	BSP1/2"M	BSP3/4"M
QY3406-24V	24V, 30l/min, 300W	Gasoline 汽油	20-35L	06m	BSP1/2"M	BSP3/4"M
QY3406-220V	24V, 30l/min, 300W	Gasoline 汽油	20-35L	06m	BSP1/2"M	BSP3/4"M

QY3406
Ex-Proof Dispenser

Technical Data/ 技术参数表

使用电源: Voltage	12V / 24V / 220V
型机功率: Power	600W / 600W / 600W
流量范围: Flow range	1寸管款流量60L/min： 60L/min(one inch hose)
计量精度: Accuracy	+/-:0.3%
显示屏位数: digit capacity	体积：8位LCD数码显示，6位整数(如000389.56) Volume: 8 bits LCD digital display,6 bits integral(such as 000389.56)
	金额：8位LCD数码显示，6位整数(如000045.38) Price: 8 bits LCD digital display,6 bits integral(such as 000045.38)
	单价：4位LCD数码显示，2位整数(如07.78) Unit price: 4 bits LCD digital display, 2 bits integral(such as 07.78)
单价设计范围: Single design range	0~99.99
单次计数范围: Single range	体积或金额：999999.99 Volume or price: 999999.99
日累计数范围: daily cumulative range	体积或金额：999999.99 Volume or price: 999999.99
总体积累计范围(升): Accumulative range(liter)	99999999
总金额累计范围(元): Accumulative range(price)	99999999
油管长度: hose length	标配：10米和15米出油管 2米进油管 Standard: oil output pipe:10m, 15m inlet pipe: 2m
吸程: suction height	5m
扬程: delivery lift	20m
重量: weight	12V/24V 重量为：120Kg 220V 重量为：120Kg 12V/24V: 120KG 220V: 122KG

Product introduction/ 产品介绍

RoHS compliant

Dimension/尺寸

Model	A	B	C	D	E	F	G	H
HOSE REEL	500	475	155	240	202	200	163	10.5

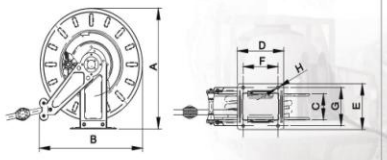

Accessories/ 配件

Adblue pump

Adblue Nozzle(M)

Adblue Meter

Adblue Digit Nozzle

AdBlue Dispenser/Hose Reel

尿素加注机/卷管器

Automatic hose reel for AdBlue® filling tanks. All the components are compatible with urea in order to avoid parts corrosion, so to prevent urea contamination.

自动回收尿素卷管器是一种高强度，高耐腐蚀科技解决方案，广泛用于汽车，工业，尿素加注领域。

Features/ 特点

- The 4 reel ball bearings on the arms facilitate the unrolling of the hose, avoiding friction that would cause a gradual deterioration
- The hose can be locked at the desired length
- Ratchet prevents unlock when hose is completely extended
- Corrosion resistant: the hot galvanized
- steel structure is moulded and coated with electrostatic polyester powder UV rays resistant
- Easy and versatile installation through the rotating support plate and the adjustable arm positions
- spring-driven retractable hose
- Hose stop，reduce pressure loss
- Compatibility: all bolts and nuts use stainless steel

- 出口4个滚轮构造有利于软管的伸缩自如，避免软管和其它物摩擦导致其破损。
- 尿素管拉出来有不同的长度固定档位。
- 如果管子全部拉出来了，定位棘轮就处于不定位状态，以防止死机
- 高耐腐蚀；全部用热镀锌钢板成型，表层涂采用静电喷塑且耐紫外线。
- 采用左右摆动底座板和引导臂不同位置的变动，很容易安装且方便灵活。
- 带弹簧回收装置。
- 带管夹，以防止尿素管被全部拉进去。

Specifications/ 技术参数如下

- Spring driven double arm hose reel
- Designed to transfer Adblue, chemical
- Heavy duty construction for long life in industrial and automotive applications
- High quality impact resistant steel drum
- Maximum pressure 300psi(20bar)
- All fittings (fluid pass) in 304 stainless steel
- Wall, ceiling or floor mounted
- 8 metre EDPM hose and 1 meter EDPM connection hose
- 3/4" BSP Inlet/outlet

- 输送尿素,低腐蚀化工场合。
- 高强度,高寿命设计, 广泛运用于汽车,化工领域。
- 高品质的卷盘设计
- 最大工作压力:20bar
- 过介质零件都采用304不锈钢材质
- 可安装在墙壁，地板或天花板上
- 8米EDPM出管和1米EDPM进管
- 进出口BSP:3/4"
- 弹簧驱动的双臂软

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	工作压力 Working Pressure	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRA008	Hosereel without 15m hose (不带管)	Adlue, Urea	10bar	/	3/4"	3/4"
HRA008A	Hose reel with 15m hose (带管)	Adlue, Urea	10bar	8m	3/4"	BSP3/4"M
HRA015	Dispenser (尿素机)	Adlue, Urea	10bar	4m	3/4"	3/4"
HRA015A	Dispenser (尿素机)	Adlue, Urea	10bar	4m	3/4"	3/4"

Preset Dispenser
定量计量卷管器

Dispenser unit with automatic hose reel, the 15 metres of hose with automatic nozzle allows dispensing up to 45L/min with DC power supply. The automatic hose reel, the DC pumps and the automatic nozzle are integrated in a sturdy supporting structure. Easy to install, versatile, compact, necessary to complete mobile or fixed tanks.

集高效率，高性能，高强度为一体的带泵自动卷管器开创了中国卷管器市场新的篇章，设计美观，操作简便，自带油泵（45L/min），滤网和加油枪，广泛用于移动油罐车，工程队，内部车队加油等领域。

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	流量 (升 / 分) low Rate L/M	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRF3415-12V	Hose reel with 15m hose, 12V, 45l/min, 200W	Diesel,Korensen, 柴油，煤油	45-55L	15m (10M)	BSP1"M	BSP3/4"M
HRF3415-24V	Hose reel with 15m hose, 24V, 45l/min, 300W	Diesel,Korensen, 柴油，煤油	45-55L	15m (10M)	BSP31"M	BSP3/4"M
HRF3415-220V	Hose reel with 15m hose, 220V, 45l/min, 550W	Diesel,Korensen, 柴油，煤油	45-55L	15m (10M)	BSP1"M	BSP1"M
HRF1115-12V	Hose reel with 15m hose, 12V, 65l/min, 400W	Diesel,Korensen, 柴油，煤油	55-65L	15m (10M)	BSP1"M	BSP1"M
HRF1115-24V	Hose reel with 15m hose, 24V, 65l/min, 400W	Diesel,Korensen, 柴油，煤油	55-65L	15m (10M)	BSP1"M	BSP1"M
HRF1115-220V	Hose reel with 15m hose, 220V, 65l/min, 550W	Diesel,Korensen, 柴油，煤油	55-65L	15m (10M)	BSP1"M	BSP1"M

Product interduction/ 产品介绍

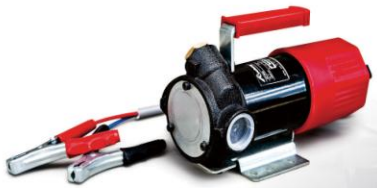

Accessories/ 配件

Consists of/ 由下列配件组成：

1. Automatic hose reel/自动回收卷盘
2. Adjustable arms with end-of-travel hose stop/可以自由调整的支撑臂和夹管器
3. Diesel hose 3/4"-14m (1"-10m)/14米3/4"的油管，(10米1"的油管)
4. On/Off switch/ 开关
5. Swivel/ 旋转接头
6. Automatic nozzle/ 自封枪
7. DC pump/直流泵
8. Sturdy metal structure/ 直带油水分离的过滤网
9. Filter of the water absorption cartridge type/ 带油水分离的过滤网
10. One request: Fitting of K24, digital turbine meter/可以选配:k24 的电子枪，
11. Available in 80l/min version with 10metres of hose/ 80L/min的泵带10米油管。

Dimension/尺寸

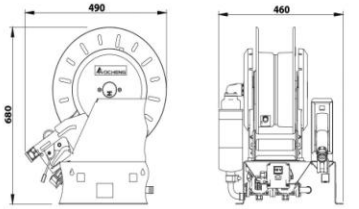

Product introduction/ 产品介绍

Electrical Hose Reel
电动卷管器

Electrical hose reels for diesel and oil have been designed to ensure high efficiency. The sturdy structure can guarantee best performance also in heavy duty conditions.

集高效率，高性能，高强度为一体的电动卷管器，设计美观. 振奋精神，操作简便， 广泛用于油罐车，工程保养车，内部车队加油车间等领域。

Specifications/技术参数如下

- Electrical driven strong arm hose reel
- Designed to transfer grease, higher pressure water
- Heavy duty construction for long life in industrial and automotive applications
- High quality impact resistant steel drum
- Maximum working pressure 200bar
- All fittings (fluid pass) in CuZn40Pb2 (brass).
- 3/4", 1" 1.5", 2", BSP Inlet/outlet

- 电动驱动卷盘，用于输送柴油，煤油，汽油领域
- 高强度，高寿命设计，广泛运用于加油工业和汽车保养等领域
- 高品质的卷盘设计
- 最大工作压力：可以选择不同管子，一般管在200bar.
- 过介质零件都采用黄铜(CuZn40Pb2)材质
- 进出口: 3/4"， 1"，1.5 "， 2"
- 所有的螺栓螺母都是用不锈钢304

HRE3440
Electrical Hose Reel

HRE3430
Electrical Hose Reel

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	工作压力 Working Pressure	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRE3430	Hose reel with 10m disel hose (带柴油管)	Diesel,Korensen 柴油，煤油	20bar	30m	BSP3/4"M	BSP3/4"M
HRE3440	Hose reel with 10m petrol hose (带加油机管)	Diesel,Korensen 柴油，煤油	20bar	40m	BSP3/4"M	BSP3/4"M
HRE3450	Hose reel without 15m hose (不带管)	Diesel,Korensen 柴油，煤油	20bar	50m	BSP3/4"M	BSP3/4"M
HRE1130	Hose reel without 10m hose (不带管)	Diesel,Korensen 柴油，煤油	20bar	30m	BSP1"M	BSP1"M
HRE1140	Hose reel with 10m disel hose (带柴油管)	Diesel,Korensen 柴油，煤油	20bar	40m	BSP1"M	BSP1"M
HRE1520	Hose reel with 10m petrol hose (带加油机管)	Diesel,Korensen 柴油，煤油	20bar	20m	BSP1.5"M	BSP1.5"M
HRE1530	Hose reel without 15m hose (不带管)	Diesel,Korensen 柴油，煤油	20bar	30m	BSP1.5"M	BSP1.5"M
HRE2220	Hose reel with 15m disel hose (带柴油管)	Diesel,Korensen 柴油，煤油	20bar	20m	BSP2"M	BSP2"M
HE2230	Hose reel with 15m petrol hose (带加油机管)	Diesel,Korensen 柴油，煤油	20bar	30m	BSP2"M	BSP2"M

Product introduction/ 产品介绍

HRD3410D-B
Diesel Hose Reel

RoHs compliant

Diesel Hose Reel
柴油自动卷管器

Automatic hose reels for diesel and oil have been designed to ensure high efficiency. The sturdy structure can guarantee best performance also in heavy duty conditions.

集高效率，高性能，高强度为一体的柴油自动卷管器开创了中国柴油卷管器市场新的篇章，设计美观. 振奋精神，操作简便， 广泛用于油罐车，工程保养车，内部车队加油车间等领域。

Features/ 特点

- The 4 reel ball bearings on the arms facilitate the unrolling of the hose, avoiding friction that would cause a gradual deterioration
- The hose can be locked at the desired length
- Ratchet prevents unlock when hose is completely extended
- Corrosion resistant: the hot galvanized
- steel structure is moulded and coated with electrostatic polyester powder UV rays resistant
- Easy and versatile installation through the rotating support plate and the adjustable arm positions
- spring-driven retractable hose
- Hose stop，reduce pressure loss
- Compatibility: all bolts and nuts use stainless steel

- 出口4个滚轮构造有利于软管的伸缩自如，避免软管和其它物摩擦导致其破损。
- 油管拉出来有不同的长度固定档位。
- 如果管子全部拉出来了，定位棘轮就处于不定位状态，以防止死机
- 高耐腐蚀：全部用热镀锌钢板成型，表层涂采用静电喷塑且耐紫外线。
- 采用左右摆动底座板和引导臂不同位置的变动，很容易安装且方便灵活。
- 带弹簧回收装置。
- 带管夹，以防止油管被全部拉进去。

Dimension/尺寸

mm

Model 型号	A	B	C	D	E	F	G	H
HRD4310	500	475	155	240	202	220	163	10.5

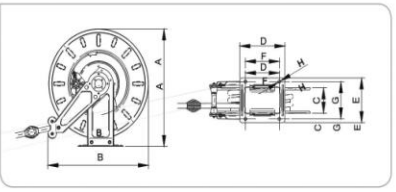

HRD3410D
Diesel Hose Reel

Specifications/ 技术参数如下

- Spring driven double arm hose reel
- Designed to transfer diesel, petrol, korensene
- Heavy duty construction for long life in industrial and automotive applications
- High quality impact resistant steel drum
- aximum working pressure 20bar
- All fittings (fluid pass) in CuZn40Pb2 (brass).
- Wall, ceiling or floor mounted
- BSP3/4"or1" BSP Inlet/outlet

- ◆输送柴油，煤油，汽油领域
- ◆高强度，高寿命设计，广泛运用于加油工业和汽车保养等领域
- ◆高品质，耐冲击卷盘
- ◆最大工作压力：一般管在20bar,
- ◆过介质零件都采用黄铜(CuZn40Pb2)材质
- ◆可安装在墙壁，地板或天花板上
- ◆进出口: BSP3/4" or 1"
- ◆弹簧驱动的双臂软管卷盘
- ◆所有的螺栓螺母都是用不锈钢304

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	工作压力 Working Pressure	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRD3410	Hose reel without 10m hose (不带管)	Diesel,Korensen, 柴油，煤油	20bar	10m	BSP3/4"M	BSP3/4"M
HRD3410D	Hose reel with 10m disel hose (带柴油管)	Diesel,Korensen, 柴油，煤油	20bar	10m	BSP3/4"M	BSP3/4"M
HRD3410	Hose reel without 10m hose (不带管)	Diesel,Korensen, 柴油，煤油	20bar	10m	BSP3/4"M	BSP3/4"M
HRD3415	Hose reel without 15m hose (不带管)	Diesel,Korensen, 柴油，煤油	20bar	15m	BSP3/4"M	BSP3/4"M
HRD1110	Hose reel without 10m hose (不带管)	Diesel,Korensen, 柴油，煤油	20bar	10m	BSP1"M	BSP1"M
HRD1110D	Hose reel with 10m disel hose (带柴油管)	Diesel,Korensen, 柴油，煤油	20bar	10m	BSP1"M	BSP1"M
HRD1115	Hose reel without 15m hose (不带管)	Diesel,Korensen, 柴油，煤油	20bar	15m	BSP1"M	BSP1"M
HRD1115D	Hose reel with 15m disel hose (带柴油管)	Diesel,Korensen, 柴油，煤油	20bar	15m	BSP1"M	BSP1"M
HRP3410	Hose reel without 10m hose (不带管)	Petrol 汽油	20bar	10m	BSP3/4"M	BSP3/4"M
HRP3410J	Hose reel with 10m disel hose (带汽油管)	Petrol 汽油	20bar	10m	BSP3/4"M	BSP3/4"M
HRD1120	Hose reel without 15m hose (不带管)	Diesel,Korensen, 柴油，煤油	20bar	20m	BSP1"M	BSP1"M
HRD1120D	Hose reel with 15m disel hose (带柴油管)	Diesel,Korensen, 柴油，煤油	20bar	20m	BSP1"M	BSP1"M

Product introduction/ 产品介绍

ROhs compliant

HRO1210A
Oil Hose Reel

Dimension/尺寸

Model/型号	A	B	C	D	E	F	G	H
HOSE REEL SMALL	480	445	130	240	140	200	105	10.5

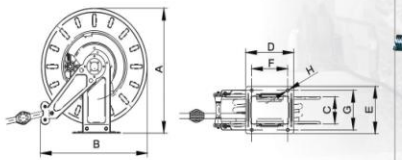

Accessories/ 配件

HRO121AE

Oil Hose Reel
机油自动卷管器

The automatic oil hose reels are projected to work up to 150 BAR pressure. It can be used in all industries, workshops, service stations, garages, etc. They are built with high standard quality and attention to material to provide high performances.

自动机油高压卷管器是广泛应用于工作压力高出150bar的输送领域,比如重型工业、制造车间、4S 店车间、车库, 洗车店等场所。

Features/ 特点

- The 4 reel ball bearings on the arms facilitate the unrolling of the hose, avoiding friction that would cause a gradual deterioration
- The hose can be locked at the desired length
- Ratchet prevents unlock when hose is completely extended
- Corrosion resistant: the hot galvanized
- steel structure is moulded and coated with electrostatic polyester powder UV rays resistant
- Easy and versatile installation through the rotating support plate and the adjustable arm positions
- spring-driven retractable hose
- Hose stop，reduce pressure loss
- Compatibility: all bolts and nuts use stainless steel

- 出口4个滚轮构造有利于软管的伸缩自如，避免软管和其它物摩擦导致其破损。
- 油管拉出来有不同的长度固定档位。
- 如果管子全部拉出来了，定位棘轮就处于不定位状态，以防止死机
- 高耐腐蚀：全部用热镀锌钢板成型，表层涂采用静电喷塑且耐紫外线。
- 采用左右摆动底座板和引导臂不同位置的变动，很容易安装且方便灵活。
- 带弹簧回收装置。
- 带管夹，以防止油管被全部拉进去。

Specifications/ 技术参数如下

- Spring driven double arm hose reel
- Designed to transfer Oil
- Heavy duty construction for long life in industrial and automotive applications
- High quality impact resistant steel drum
- aximum working pressure 150bar
- All fittings (fluid pass) in CuZn40Pb2 (brass).
- Wall, ceiling or floor mounted
- NPT1/2", 3/8" Inlet/outlet

- 输送机油等场合。
- 高强度高寿命设计广泛运用于工程机械工业和汽车保养等领域。
- 高品质的卷盘设计
- 最大工作压力:150bar
- 过介质零件都采用黄铜(CuZn40Pb2)材质
- 可安装在墙壁，地板或天花板上
- 进出口: NPT1/2"
- 弹簧驱动的双臂软管卷盘

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	工作压力 Working Pressure	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRO1215	Hosereel without 15m hose (不带管)	Oil Lub, 机油,润滑油	150bar	15m	NPT1/2"M	NPT1/2"M
HRO1215A	Hose reel with 15m hose (带管)	Oil Lub, 机油,润滑油	150bar	15m	NPT1/2"M	NPT1/2"M
HRO1210A	Hose reel with 15m hose (带管)	Oil Lub, 机油,润滑油	150bar	10m	NPT1/2"M	NPT1/2"M

Grease Hose Reel
黄油高压卷管器

MADE IN CHINA 100% AOCHENG QUALITY

The automatic hose reels are projected to work up to 400 BAR pressure. It can be used in all industries, workshops, service stations, garages, etc. They are built with high standard quality and attention to material to provide high performances.

自动黄油高压卷管器是广泛应用于工作压力高出400bar的输送领域, 比如重型工业、制造车间、4S店车间、车库, 洗车店等场所。提供高标准, 高性能的产品是我们永恒的追求

Features/ 特点

- The 4 reel ball bearings on the arms facilitate the unrolling of the hose, avoiding friction that would cause a gradual deterioration
- The hose can be locked at the desired length
- Ratchet prevents unlock when hose is completely extended
- Corrosion resistant: the hot galvanized
- steel structure is moulded and coated with electrostatic polyester powder UV rays resistant
- Easy and versatile installation through the rotating support plate and the adjustable arm positions
- spring-driven retractable hose
- Hose stop，reduce pressure loss
- Compatibility: all bolts and nuts use stainless steel

- 出口4个滚轮构造有利于软管的伸缩自如，避免软管和其它物摩擦导致其破损。
- 油管拉出来有不同的长度固定档位。
- 如果管子全部拉出来了，定位棘轮就处于不定位状态，以防止死机
- 高耐腐蚀：全部用热镀锌钢板成型，表层涂采用静电喷塑且耐紫外线。
- 采用左右摆动底座板和引导臂不同位置的变动，很容易安装且方便灵活。
- 带弹簧回收装置。
- 带管夹，以防止油管被全部拉进去。

Accessories/ 配件

Fix support plate

Rotating support plate

Nozzle

Hose connection

HRG1415
Grease Hose Reel

Specifications/ 技术参数如下

- Spring driven double arm hose reel
- Designed to transfer grease, higher presure water
- Heavy duty construction for long life in industrial and automotive applications
- High quality impact resistant steel drum
- Maximum working pressure 400bar
- All fittings (fluid pass) in CuZn40Pb2 (brass).
- Wall, ceiling or floor mounted
- 1/4", 3/8" NPT Inlet/outlet

- 输送黄油高压水枪等场合。
- 高强度高寿命设计广泛运用于工程机械工业和汽车保养等领域。
- 高品质的卷盘设计。
- 最大工作压力：400bar
- 过介质零件都采用黄铜(CuZn40Pb2)材质
- 可安装在墙壁，地板或天花板上
- 进出口NPT: 1/4"，3/8"
- 弹簧驱动的双臂软管卷盘
- 所有的螺栓螺母都是用不锈钢304

Dimension/尺寸

Model/型号	A	B	C	D	E	F	G	H
HRG1415	480	445	130	240	140	200	105	10.5

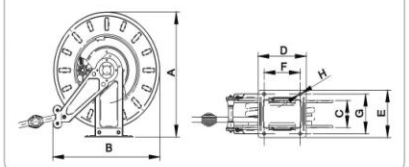

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	工作压力 Working Pressure	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRG1415	Hosereel without 15m hose (不带管)	Grease Water, 黄油，水	400bar	/	NPT1/4"M	NPT1/4"M
HRG1415A	Hose reel with 15m hose (带管)	Grease Water, 黄油，水	400bar	15m	NPT1/4"M	NPT1/4"M
HRA3815	Hosereel without 15m hose (不带管)	Grease Water, 黄油，水	400bar	/	NPT3/8"M	NPT3/8"M
HRA3815A	Hose reel with 15m hose (带管)	Grease Water, 黄油，水	400bar	15m	NPT3/8"M	NPT3/8"M

Product introduction/ 产品介绍

ROhs compliant

HRA1215A
Air/water Hose Reel

Dimension/尺寸

Model	A	B	C	D	E	F	G	H
OPEN REEL SMALL	480	445	130	240	140	200	105	10.5

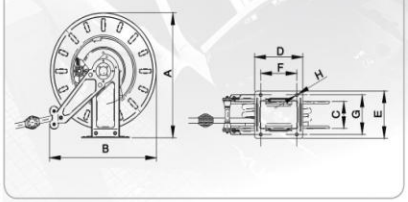

Accessories/ 配件

Cleaning tanker

Foam Lance

Spray Gun

SINCE 1985

MADE IN CHINA 100% AOCHENG QUALITY

Air/water Hose Reel
空气/水自动卷管器

Automatic Air/waterhose reels have been designed to ensure high efficiency. The sturdy structure can guarantee best performance also in heavy duty conditions.

集高效率，高性能，高强度为一体的水、气自动卷管器开创了水、气卷管器市场新的篇章，设计美观，振奋精神，操作简便，广泛用于油罐车，工程保养车，内部车队等领域。

Features/ 特点

- The 4 reel ball bearings on the arms facilitate the unrolling of the hose, avoiding friction that would cause a gradual deterioration
- The hose can be locked at the desired length
- Ratchet prevents unlock when hose is completely extended
- Corrosion resistant: the hot galvanized
- steel structure is moulded and coated with electrostatic polyester powder UV rays resistant
- Easy and versatile installation through the rotating support plate and the adjustable arm positions
- spring-driven retractable hose
- Hose stop，reduce pressure loss
- Compatibility: all bolts and nuts use stainless steel

- 出口4个滚轮构造有利于软管的伸缩自如，避免软管和其它物摩擦导致其破损。
- 管拉出来有不同的长度固定档位。
- 如果管子全部拉出来了，定位棘轮就处于不定位状态，以防止死机
- 高耐腐蚀：全部用热镀锌钢板成型，表层涂采用静电喷塑且耐紫外线。
- 采用左右摆动底座板和引导臂不同位置的变动，很容易安装且方便灵活。
- 带弹簧回收装置。
- 带管夹，以防止管被全部拉进去。

Specifications/ 技术参数如下

- Spring driven double arm hose reel
- Designed to transfer Air, higher presure water
- Heavy duty construction for long life in industrial and automotive applications
- High quality impact resistant steel drum
- aximum working pressure 400bar
- All fittings (fluid pass) in CuZn40Pb2 (brass).
- Wall, ceiling or floor mounted
- NPT1/4", 3/8" Inlet/outlet

- 输送高压水、气领域
- 高强度，高寿命设计，广泛运用于汽车保养等领域
- 高品质的卷盘设计
- 最大工作压力：可以选择不同管子，一般管在400bar.
- 过介质零件都采用黄铜(CuZn40Pb2)材质
- 可安装在墙壁，地板或天花板上
- 进出口: NPT3/4" or 3/8"
- 弹簧驱动的双臂软管卷盘
- 所有的螺栓螺母都是用不锈钢304

Technical Data/ 技术参数表

型号 Code	描述 Description	介质 Fluids	工作压力 Working Pressure	管子长度 Hose Length	进口 Inlet	出口 Outlet
HRA3815A	Hose reel with 15m hose (带管)	Air Water, 空气，水	20/350bar	15m	NPT3/8"M	NPT3/8"M
HRA1215A	Hose reel with 15m hose (带管)	Air Water, 空气，水	20/350bar	15m	NPT1/2"M	NPT1/2"M

HRM001

HRM002

HRM003

HRM004

HRM005

HRM006

HRM007

HRM008

HRM009

Hose reel technology solutions 卷盘工业专家
Http://yjaocheng.en.alibaba.com